


Rammsondierungen nach DIN EN 22746-2

Tiefe	N ₁₀
0.10	1
0.20	1
0.30	4
0.40	3
0.50	4
0.60	4
0.70	4
0.80	4
0.90	4
1.00	4
1.10	4
1.20	3
1.30	4
1.40	3
1.50	4
1.60	3
1.70	4
1.80	4
1.90	3
2.00	4
2.10	3
2.20	3
2.30	3
2.40	3
2.50	3
2.60	2
2.70	2
2.80	2
2.90	2
3.00	2
3.10	1
3.20	2
3.30	1
3.40	1
3.50	1
3.60	1
3.70	1
3.80	1
3.90	2
4.00	1
4.10	2
4.20	2
4.30	1
4.40	2
4.50	2
4.60	2
4.70	3
4.80	3
4.90	4
5.00	4
5.10	4
5.20	5
5.30	4
5.40	4
5.50	4
5.60	4
5.70	5
5.80	5
5.90	6
6.00	9

DPH 1

Ansatzpunkt: 405.10 m ü. NN

Anzahl Schläge N10

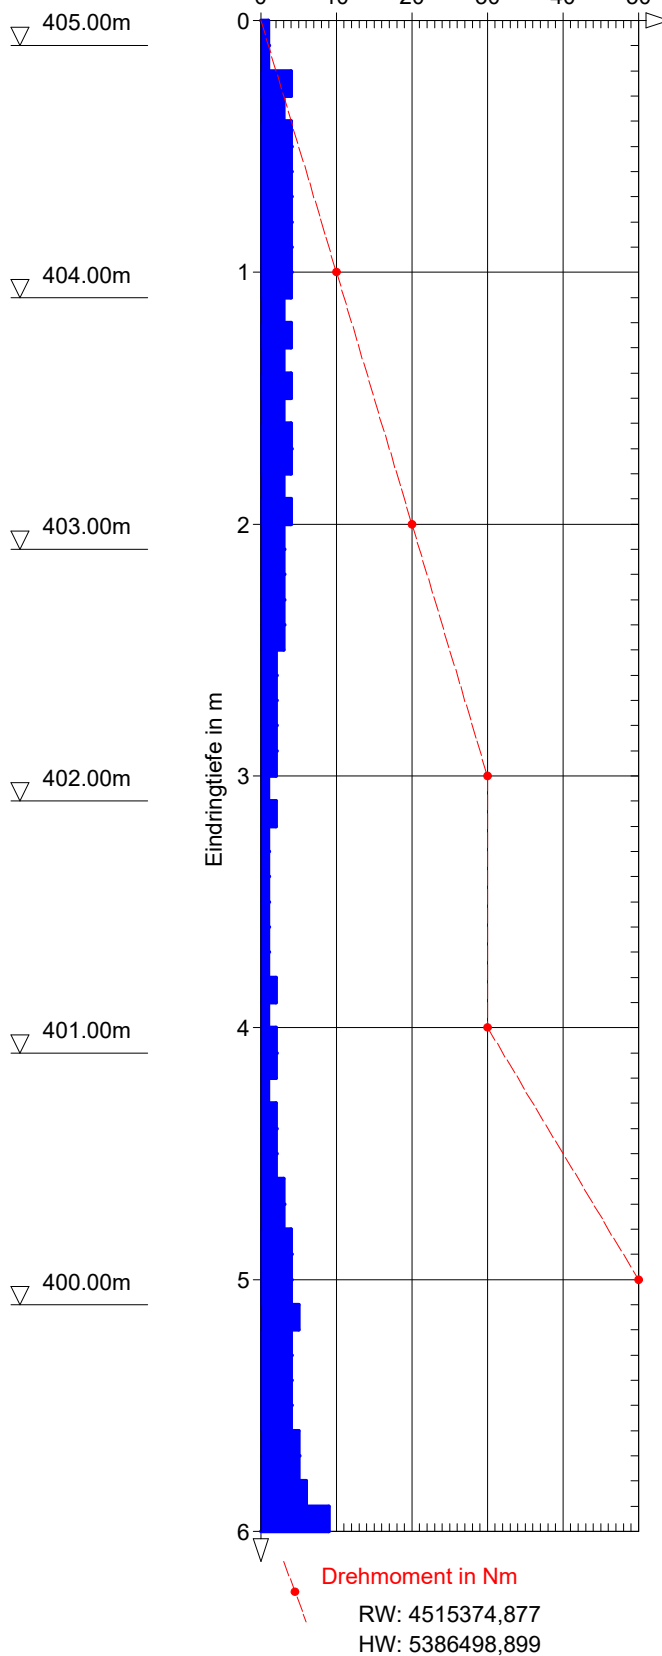


Rammsondierungen nach DIN EN 22746-2

Tiefe	N ₁₀
0.10	1
0.20	2
0.30	5
0.40	5
0.50	5
0.60	4
0.70	5
0.80	4
0.90	4
1.00	4
1.10	3
1.20	3
1.30	3
1.40	4
1.50	3
1.60	2
1.70	2
1.80	2
1.90	2
2.00	2
2.10	1
2.20	2
2.30	1
2.40	2
2.50	2
2.60	1
2.70	2
2.80	2
2.90	2
3.00	2
3.10	2
3.20	2
3.30	2
3.40	2
3.50	1
3.60	1
3.70	1
3.80	1
3.90	2
4.00	1
4.10	1
4.20	2
4.30	1
4.40	2
4.50	2
4.60	2
4.70	2
4.80	3
4.90	3
5.00	4
5.10	4
5.20	3
5.30	2
5.40	2
5.50	2
5.60	3
5.70	3
5.80	3
5.90	4
6.00	4

DPH 2

Ansatzpunkt: 404.48 m ü. NN

Anzahl Schläge N10

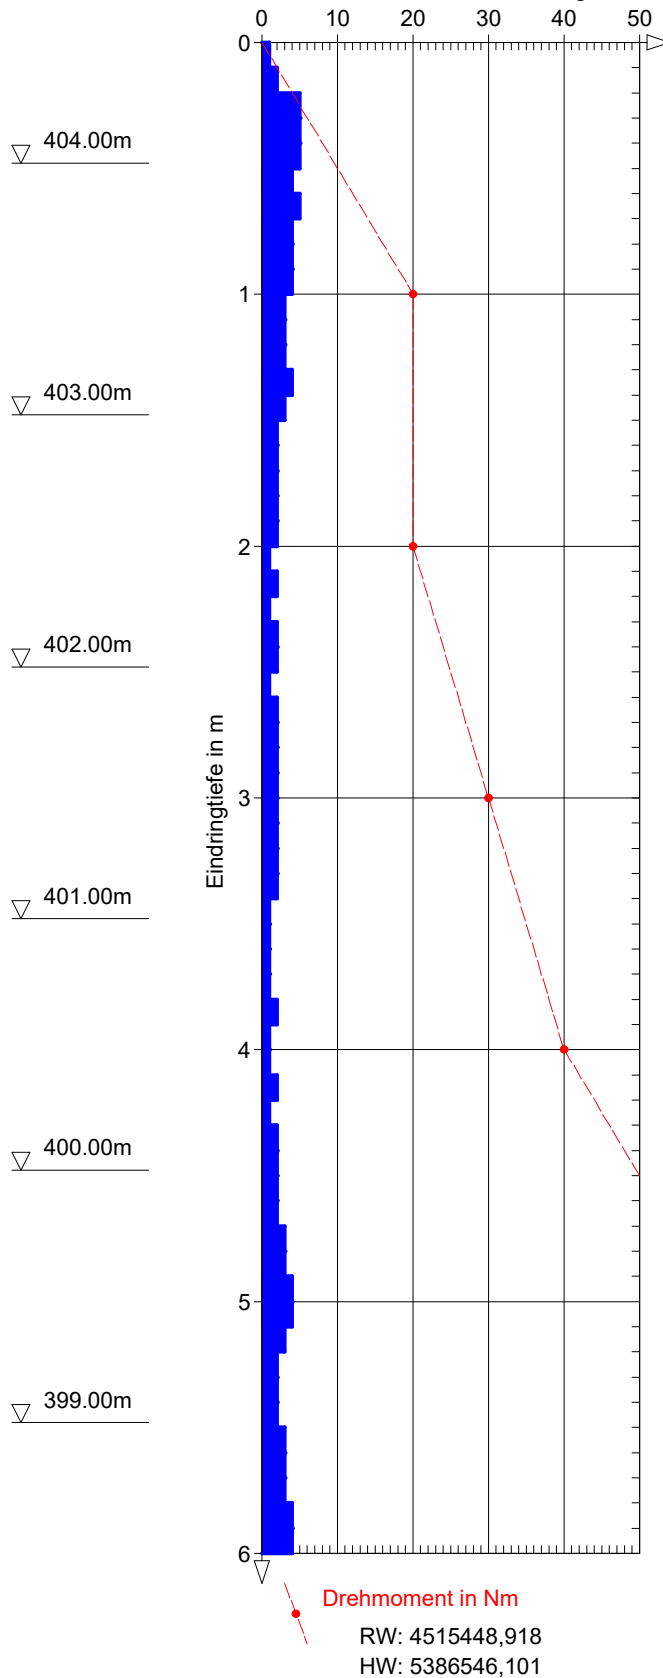

RW: 4515448,918

HW: 5386546,101


Rammsondierungen nach DIN EN 22746-2

Tiefe	N ₁₀
0.10	1
0.20	2
0.30	4
0.40	5
0.50	5
0.60	5
0.70	5
0.80	5
0.90	6
1.00	7
1.10	6
1.20	4
1.30	3
1.40	3
1.50	3
1.60	3
1.70	3
1.80	3
1.90	3
2.00	2
2.10	2
2.20	2
2.30	1
2.40	2
2.50	1
2.60	2
2.70	2
2.80	1
2.90	2
3.00	1
3.10	2
3.20	1
3.30	2
3.40	1
3.50	2
3.60	2
3.70	2
3.80	2
3.90	3
4.00	3
4.10	2
4.20	2
4.30	3
4.40	2
4.50	1
4.60	2
4.70	2
4.80	3
4.90	2
5.00	3
5.10	3
5.20	3
5.30	3
5.40	2
5.50	3
5.60	2
5.70	2
5.80	2
5.90	3
6.00	2

DPH 3

Ansatzpunkt: 401.98 m ü. NN

Anzahl Schläge N10

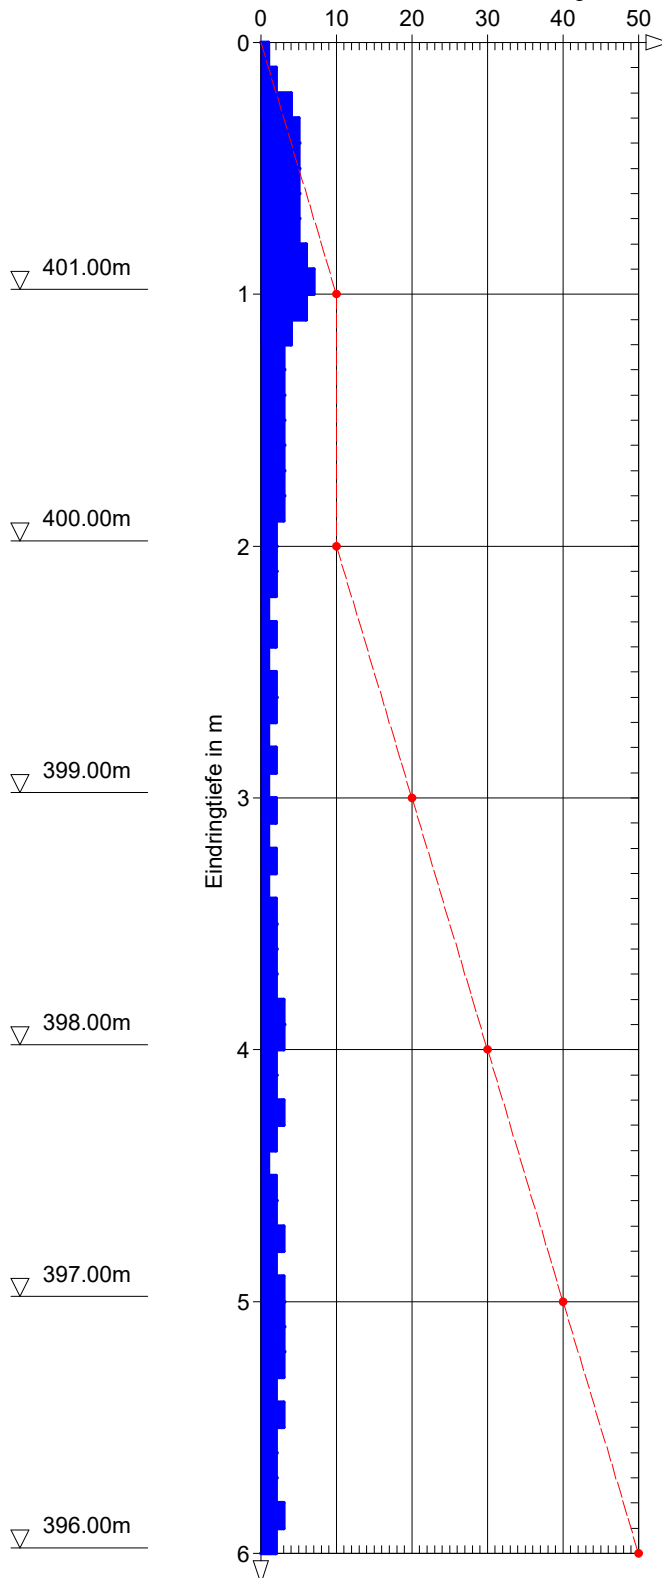

Drehmoment in Nm
RW: 4515454,165
HW: 5386507,964

Rammsondierungen nach DIN EN 22746-2

Tiefe	N ₁₀
0.10	1
0.20	2
0.30	2
0.40	3
0.50	4
0.60	5
0.70	5
0.80	6
0.90	6
1.00	5
1.10	4
1.20	4
1.30	4
1.40	4
1.50	3
1.60	3
1.70	3
1.80	3
1.90	3
2.00	2
2.10	2
2.20	2
2.30	2
2.40	2
2.50	2
2.60	2
2.70	1
2.80	2
2.90	1
3.00	2
3.10	1
3.20	1
3.30	2
3.40	1
3.50	2
3.60	2
3.70	2
3.80	2
3.90	2
4.00	2
4.10	2
4.20	2
4.30	3
4.40	2
4.50	3
4.60	3
4.70	3
4.80	3
4.90	2
5.00	3
5.10	3
5.20	4
5.30	3
5.40	2
5.50	3
5.60	3
5.70	3
5.80	4
5.90	4
6.00	4

DPH 4

Ansatzpunkt: 404.00 m ü. NN

